

www.somfy.com

WIRED TECHNOLOGY

Smoove Origin IB

DK

Installationsvejledning






GB

Installation guide

NL

Montagehandleiding

Ref. 5111445D

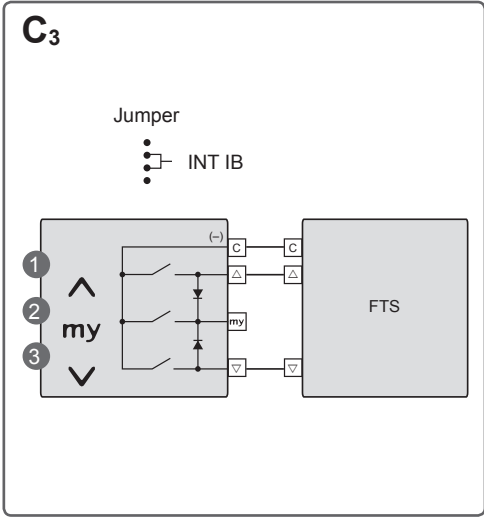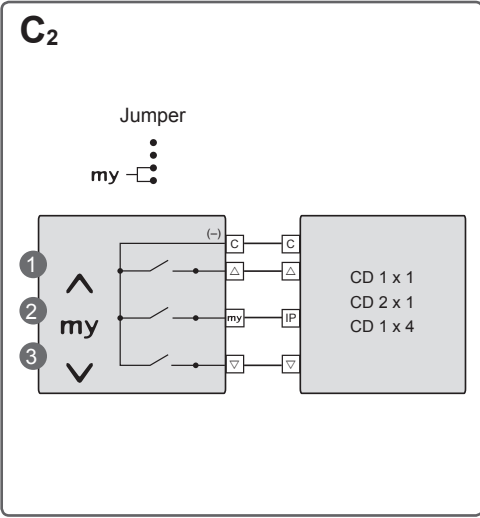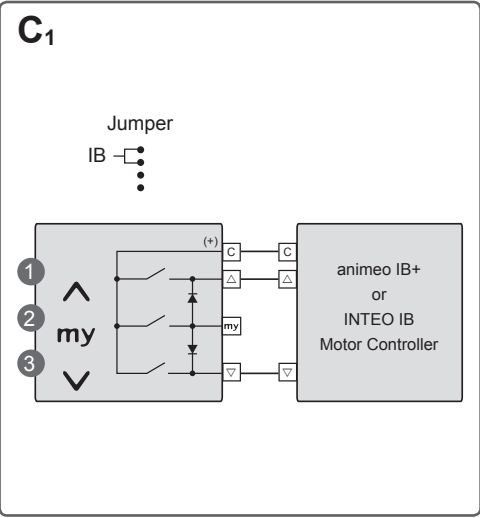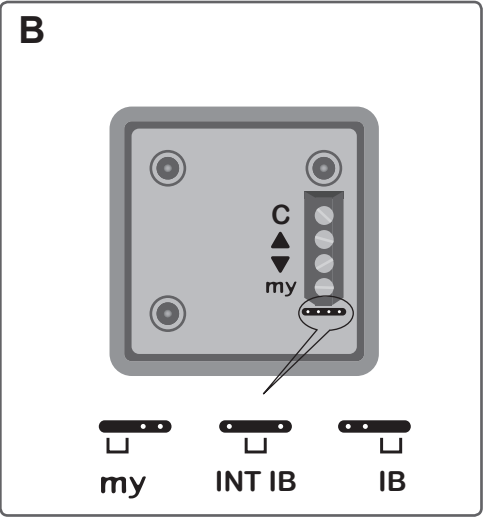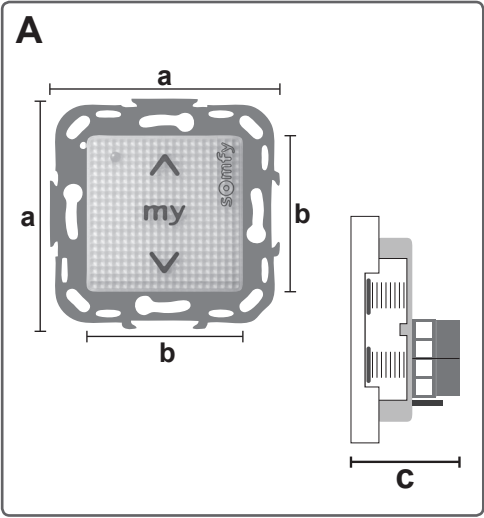

SPECIFIKATIONER: Smoove Origin IB		
Smoove Origin IB	Ref. 1811272	
Tør kontakt	24 V DC / 50 mA	△
Klemmer	Skruekoblinger	
Driftstemperatur	0° C til 40° C	
Relativ fugtighed	Max. 85 %	
Kabinetmateriale	PC/ABS Polykarbonat	
Kabinetmål	50x50x27 mm	
Beskyttelsesklasse	IP 20	
Beskyttelsesklasse	III	
Overensstemmelse	www.somfy.com/ce	

DK	Mål
	a = 71 mm b = 50 mm c = 25 mm

Kabel
Min.: 4 x 0.28 mm ² /22 AWG Max.: 4 x 1.5 mm ² /15 AWG

Tilslutning til animeo IB+ eller Inteo IB motor controllers
1 Op 2 Stop/IP (my) 3 Ned
△ Jumper til „IB“

Tilslutning til animeo CD motor controllers
1 Op 2 Stop/my 3 Ned
△ Jumper til „my“

Tilslutning til FTS styring
1 Op 2 Stop/my 3 Ned
△ Jumper til „INT IB“

CHARACTERISTICS: Smoove Origin IB		
Smoove Origin IB	Ref. 1811272	
Dry contact	24 V DC / 50 mA	△
Terminals	Screw terminals	
Operating temperature	0° C to 40° C	
Relative humidity	Max. 85 %	
Material of housing	PC-ABS	
Housing dimensions	50x50x27 mm	
Degree of protection	IP 20	
Protection class	III	
Conformity	www.somfy.com/ce	

GB	Measurements
	a = 71 mm b = 50 mm c = 25 mm

Cables
Min.: 4 x 0.28 mm ² /22 AWG Max.: 4 x 1.5 mm ² /15 AWG

Connection to animeo IB+ or Inteo IB motor controls
1 Up 2 Stop/IP (my) 3 Down
△ Jumper on „IB“

Connection to animeo CD motor controllers
1 Up 2 Stop/my 3 Down
△ Jumper on „my“

Connection to FTS controls
1 Up 2 Stop/my 3 Down
△ Jumper on „INT IB“

KENMERKEN: Smoove Origin IB		
Smoove Origin IB	Ref. 1811272	
Spanningsvrij contact	24 V DC / 50 mA	△
Klemmen	Schroefaansluitingen	
Werkingstemperatuur	0° C tot 40° C	
Relatieve vochtigheid	Max. 85 %	
Materiaal van de behuizing	PC/ABS Polycarbonaat	
Afmetingen behuizng	50x50x27 mm	
Beschermingsklasse	IP 20	
Beschermingsklasse	III	
Conformiteit	www.somfy.com/ce	

NL	Afmetingen
	a = 71 mm b = 50 mm c = 25 mm

Bekabeling
Min.: 4 x 0.28 mm ² /22 AWG Max.: 4 x 1.5 mm ² /15 AWG

Verbinding met animeo IB+ of Inteo IB motor controls
1 Op 2 Stop/IP (my) 3 Neer
△ Dip switch op „IB“


Verbinding met de animeo CD Motor Controllers
1 Op 2 Stop/IP (my) 3 Neer
△ Dip switch op „my“

Verbinding met FTS Controls
1 Op 2 Stop/IP (my) 3 Neer
△ Dip switch op „INT IB“

© 2013-2020 · SOMFY ACTIVITES SA · RCS ANNECY 303.970.230 · ALL RIGHTS RESERVED · 2020/08/30


D

1




E₁

1




2




E₂


2

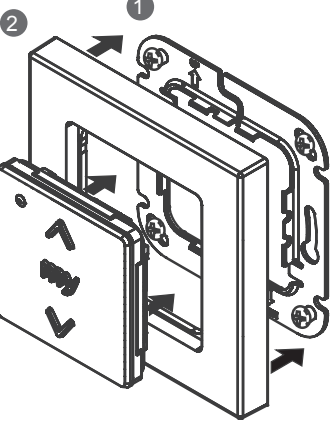


1



3



F

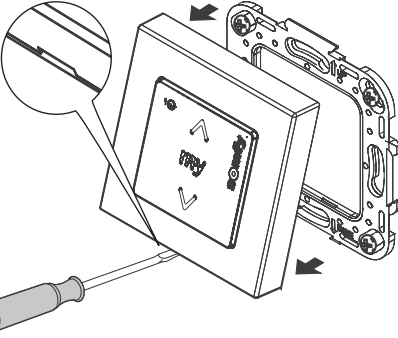

G

SOMFY ACTIVITÉS SA

50 Avenue du Nouveau Monde

74300 Cluses

France

T +33 (0)4 50 96 70 00

F +33 (0)4 50 96 71 89

www.somfy.com/projects

www.somfy.com





DK Installation/montering Egnede omgivelser: Tørt rum 1 Fæstne montererammen i installati- onsdåsen 2 Klik rammen fra kontakten på selve montererammen. 3 Koble kablerne i Smoove Origin IB og klik derefter trykpanelet i rammen.
--